



Others

● Flaring tool : EVA

A device for shaping out the of a welded pipe so as to be of increasing diameter towards the end, to fit them, zinc/copper maxi capacity 0,8 mm

- EVA80 : base and mandrel : 80 mm
- EVA100 : base and mandrel : 100 mm
- EVA80-100 : base and mandrels : 80 and 100 mm



● Punching machine line : SDS1000

- 6 holes \varnothing 3,2 mm punches in one go
- The machine is equipped with depth gauges and adjustable lateral gauges
- The punching heads (6) are adjustable

Options:

- Spring pedal foot operated keeps hands free.
- Punch diameters available

Features

Width (mm)	1 020
Mini center distance (mm)	25
Steel capacity S235JR (mm)	1
Weight (kg)	60



● Slate-cutter : CA600

Useful

- Hooking on batten
- Quick adjustment stop for straight and angular cuts
- Longer table to cope with slates up to 600 mm

Competitive

- From thin fibro to thicker slate up to 6 mm with updated plate


Strong

- Ball bearing steel guide




● Slate-cutter : CAREP


- Foldable version
- Fully adapted to fibro slate and thin natural slate up to 3 mm

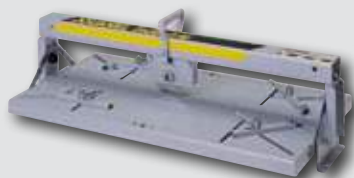

Slant hip




Left




Slant hip*




Right parisian hip



Half



Heel hip



* Small ruler on work rest blade to adjust the gauge the closest to the knurling wheel